


# XtremeDV-fl<sup>™</sup>

## PROFESSIONAL AUDIO AND VIDEO CAPTURE CARD

Advanced Graphics Display Technology

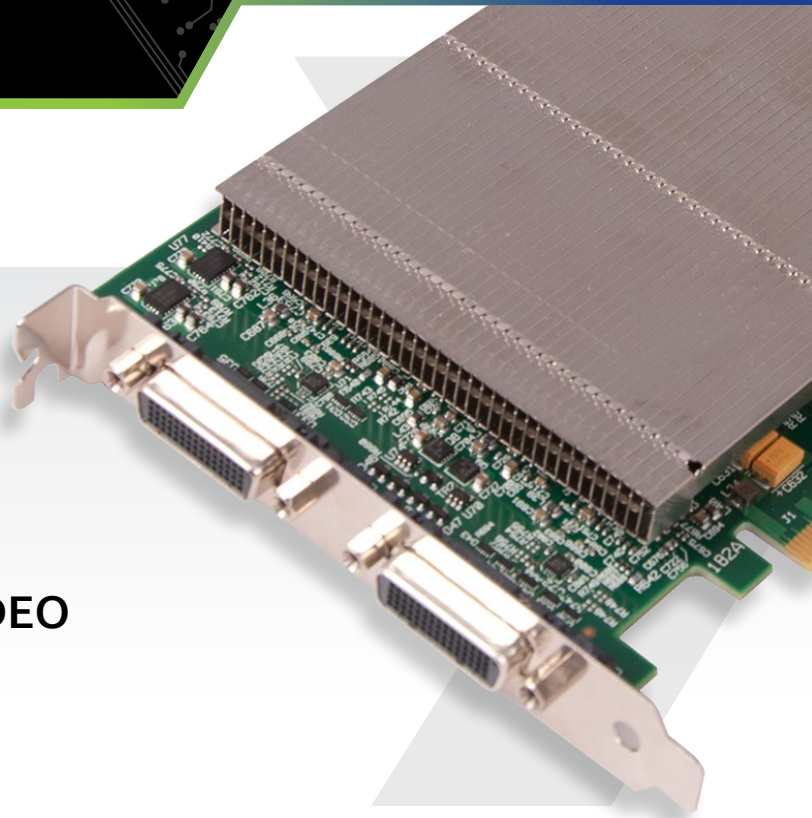

### + HIGH PERFORMANCE CARD

A wide range of applications demand multiple channels of video capture from a single card. Markets include advanced medical, defence and security applications. Suitable for these markets and others,

EMS's XtremeDV-HD<sub>4</sub>+ audio video capture card provides an outstanding, powerful solution for multiple HDMI or DVI video capture with support for HDCP\*.



### + QUAD HDMI VIDEO CAPTURE

The XtremeDV-HD<sub>4</sub>+ has four onboard HDMI 1.4 video capture channels; two channels supporting 3840x2160 at 30 fps and two channels offering support for 1920x1080 at 60 fps. All four channels are capable of operating independently of each other, enabling four

separate 4 video sources to be captured and controlled simultaneously. The card also has embedded audio support across all four channels. The XtremeDV-HD<sub>4</sub>+ is shipped with adapter cables for either HDMI or DVI.

Capture the detail...

## + VISION PERFORMANCE FEATURES

The XtremeDV-HD4+ is supplied with the EMS Xtreme Performance Driver. Combining both Hardware and Software enhancements the Xtreme Performance Driver provides users with a variety of features to help them achieve their goals. Features include LiveStream:Capture, low latency capture solution, MultiStream allowing for the independent control of multiple instances of a single capture, a hardware based time stamping facility, automatic signal detection and more.

## + VIDEO STREAMING

For streaming applications, the XtremeDV-HD4+ can be used with Windows Media Encoder to compress and stream captured video. To replay the video, use Windows® Media Player.

Any application compatible with Windows® DirectShow technology can use the XtremeDV-HD4 due to its built-in WDM support.

## + MODELS AVAILABLE

XtremeDV-HD4+/H  
Capture card with 2 x HDMI splitter cables

XtremeDV-HD4+/D  
Capture card with 2 x DVI splitter cables



## + SPECIFICATION

Board Format	PCIe x8 plug-in card
Dimensions	110mm x 177mm (inc. heat sink)
Connectors	2 x DSM59 connectors plus adapters (see below for options)
Update Rate	Channels 1 & 3 - 297M / pixels per second, Channels 2 & 4 - 165M / pixels per second
Max Capture Resolution	Channels 1 & 3 2 x 3840x2160p @ 30Hz Channels 2 & 4 2 x 1920x1080p @ 60Hz
Frame Buffer	768MB
Pixel Transfer Formats	RGB: 5-5-5, 5-6-5 or 8-8-8 (24bit/32bit) YUV: 4:2:2 MONO: 8bit
Video Modes	HDMI 1.4, HDMI 1.3, DVI
Operating System Support	Windows® XP, Windows Vista, Windows Server 2003/ 2008, Windows 7, Windows8/8.1 and Linux
Power requirements	Max current at +3.3 - 0.45A. Max current at +12V - 0.85A Max power ≈ 18W
Operating Temperature	0 to 35 °C / 32 to 96 °F
Storage Temperature	-20 to 70 °C (-4 to 158 °F)
Relative Humidity	5% to 90% non-condensing
Warranty	3 years

All products are shipped with the latest software available, unless stated otherwise. Special requirements may be organised by contacting our Sales team.

\*HDCP support requires the use of a EMS Graphics Card. Please contact EMS Sales for further information.

